



PRODUCT FEATURES

- Ultrafast Recovery Time
- Low Recovery Loss
- Soft Reverse Recovery Characteristics
- Low Leakage Current
- Low Forward Voltage
- High Surge Current Capability

APPLICATIONS

- Freewheeling, Snubber, Clamp
- Inversion Welder
- PFC
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Converter & Chopper
- UPS

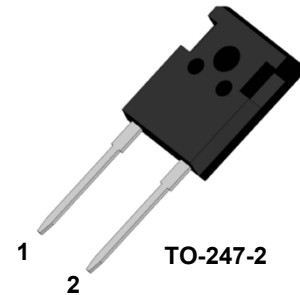

DESCRIPTION

FRED from MacMic utilizes advanced processing techniques to achieve ultrafast recovery times and higher forward current. Its soft recovery characteristics and high reliability suit for wide industrial applications.

ABSOLUTE MAXIMUM RATINGS ($T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
V_R	Maximum D.C. Reverse Voltage		1200	V
V_{RRM}	Maximum Repetitive Reverse Voltage			
$I_{F(AV)}$	Average Forward Current	$T_C=100^\circ\text{C}$	60	A
$I_{F(RMS)}$	RMS Forward Current	$T_C=100^\circ\text{C}$	84	
I_{FSM}	Non Repetitive Surge Forward Current	$T_J=25^\circ\text{C}, t=10\text{ms}, 50\text{Hz}, \text{Sine}$	540	
P_D	Power Dissipation		334	W
T_J	Junction Temperature		-55 to +175	$^\circ\text{C}$
T_{STG}	Storage Temperature Range		-55 to +150	$^\circ\text{C}$
Torque	To Heat Sink	Recommended (M3)	1.1	Nm
R_{thJC}	Junction to Case Thermal Resistance		0.45	$^\circ\text{C}/\text{W}$
Weight			6	g

ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
I_{RM}	Maximum Reverse Leakage Current	$V_R = 1200\text{V}$			10	μA
		$V_R = 1200\text{V}, T_J = 150^\circ\text{C}$			1	mA
V_F	Forward Voltage	$I_F=60\text{A}$		2.8	3.3	V
		$I_F=60\text{A}, T_J=150^\circ\text{C}$		2.25		
trr	Reverse Recovery Time	$(I_F = 1\text{A}, dI_F/dt = -200\text{A}/\mu\text{s}, V_R = 30\text{V})$		30	35	ns
trr	Reverse Recovery Time	$(I_F = 0.5\text{A}, I_R=1\text{A}, I_{RR} = 0.25\text{A})$		65	80	ns

MacMic Science & Technology Co., Ltd.

Add: #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R. of China

Tel.: +86-519-85163708 Fax: +86-519-85162291 Post Code: 213022 Website: www.macmicst.com

ELECTRICAL CHARACTERISTICS ($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions	Min.	Typ.	Max.	Unit
t_{rr}	Reverse Recovery Time		75		ns
I_{RRM}	Maximum Reverse Recovery Current		9		A
Q_{RR}	Reverse Recovery Charge		1310		nC
t_{rr}	Reverse Recovery Time		190		ns
I_{RRM}	Maximum Reverse Recovery Current		20		A
Q_{RR}	Reverse Recovery Charge		2750		nC

Test Conditions for t_{rr} , I_{RRM} , and Q_{RR} (rows 2, 3, 4): $I_F=60\text{A}, V_R=600\text{V}, dI_F/dt = -200\text{A}/\mu\text{s}$

Test Conditions for t_{rr} , I_{RRM} , and Q_{RR} (rows 5, 6, 7): $I_F=60\text{A}, V_R=600\text{V}, dI_F/dt = -200\text{A}/\mu\text{s}, T_J=150^{\circ}\text{C}$

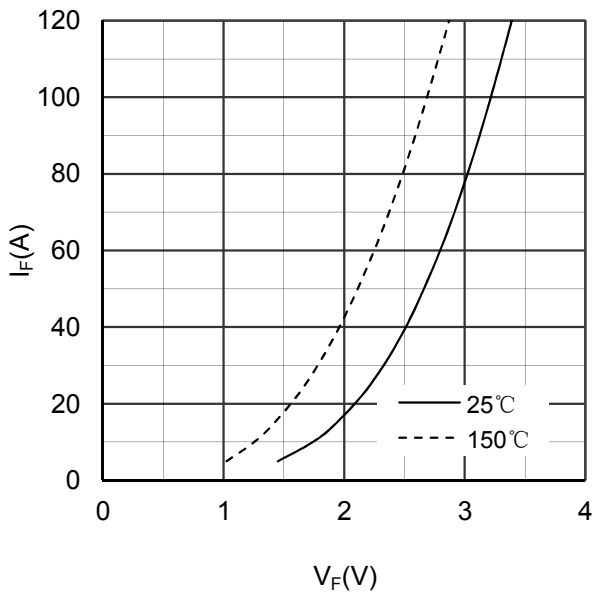


Figure 1. Forward Voltage Drop vs Forward Current

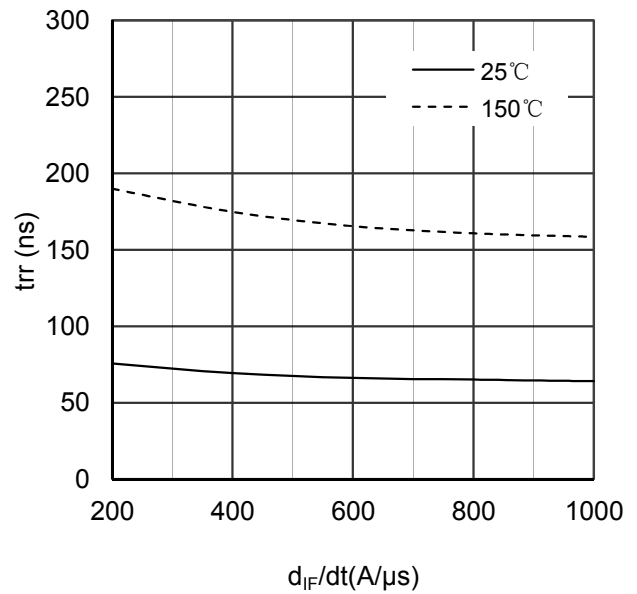


Figure 2. Reverse Recovery Time vs dI_F/dt

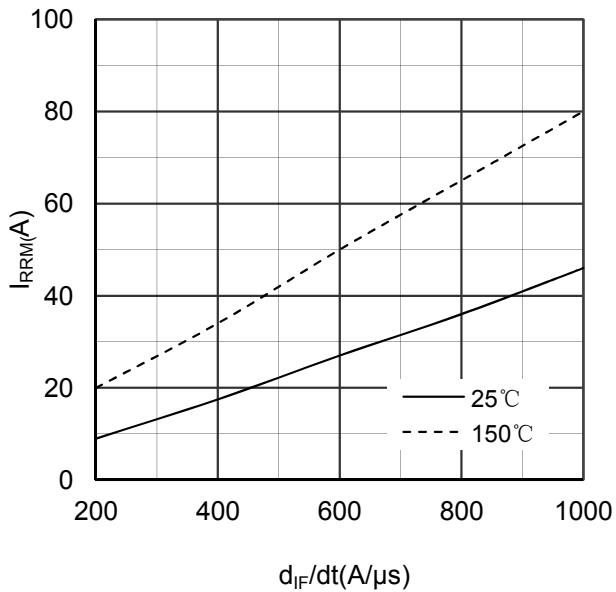


Figure 3. Reverse Recovery Current vs dI_F/dt

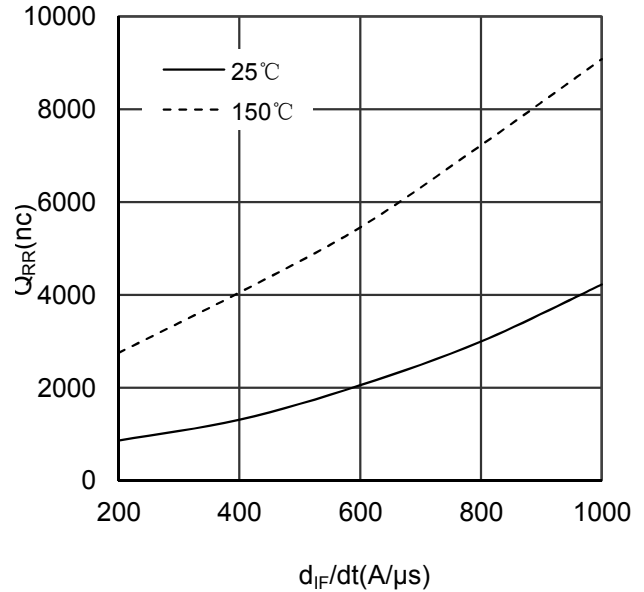


Figure 4. Reverse Recovery Charge vs dI_F/dt

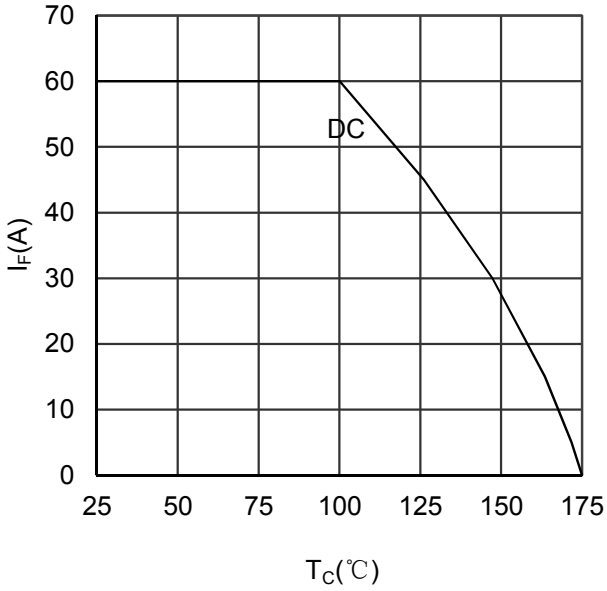


Figure 5. Forward current vs Case temperature

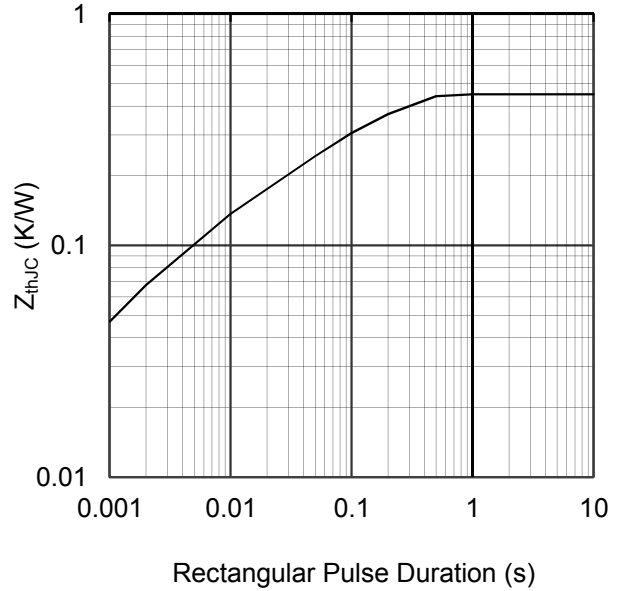


Figure 6. Transient Thermal Impedance


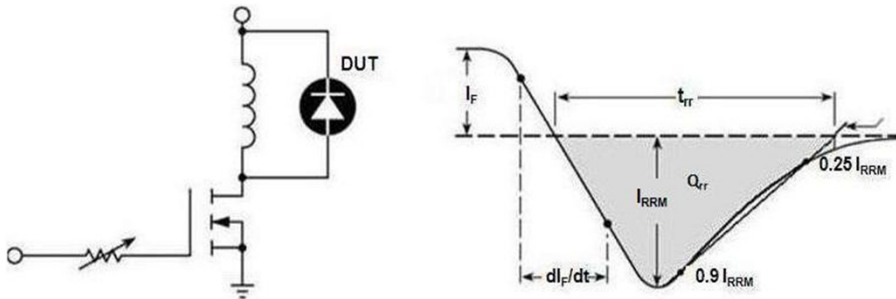


Figure 7. Diode Reverse Recovery Test Circuit and Waveform

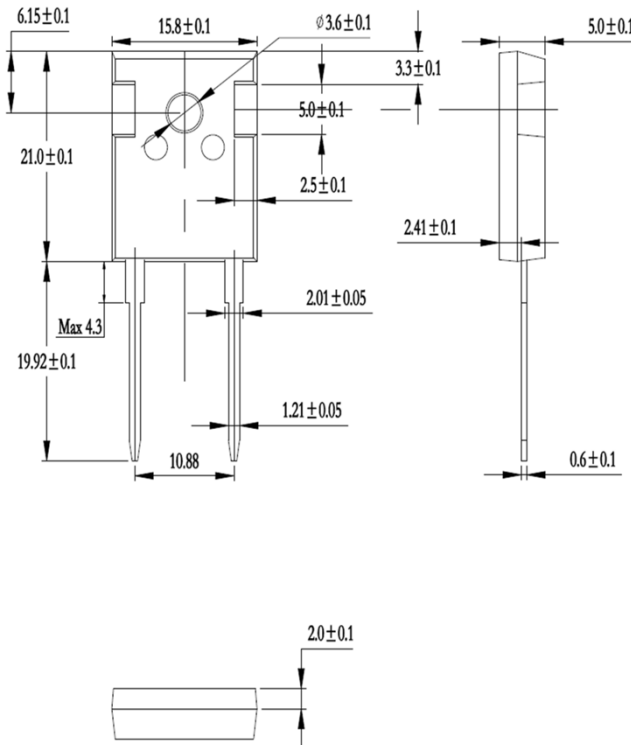

Dimensions in (mm)
Figure 8. Package Outline